


# DuPont™ Tychem® Glove Range

UNCOMPLICATED, UNCOMPROMISING PROTECTION

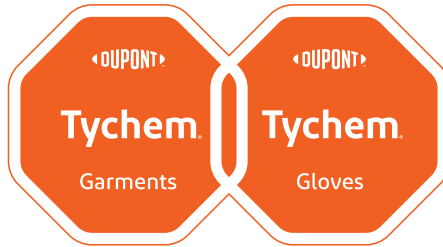

Compliant with the new Regulation (EU) 2016/425

[safespec.dupont.co.uk](http://safespec.dupont.co.uk)  
[tychemgloves.dupont.com](http://tychemgloves.dupont.com)



# Tychem® PV350

CAT III



2777

EN ISO 374-1  
TYPE B



AKLMP

EN ISO 374-5



BACTERIA & FUNGI

EN 388



3111X

Extremely durable, cotton-lined PVC construction with rough grip.  
Suitable for defensive protection from chemicals, oils and greases.



- **Coating - Liner**  
Fully coated PVC - Cotton/jersey
- **Thickness**  
Thickness: 55 mil (1,40 mm)  
Nominal coating thickness: 20 mil (0,51 mm)
- **Length**  
14 in (356 mm)
- **Grip**  
Rough grip finish
- **Color**  
Black
- **Cuff style - Shape**  
Gauntlet - Anatomical shape
- **Size**  
10 / LG
- **Pairs/case**    **bags/case**    **pairs/bag**  
72                      6                      12

Tychem® PV350 gloves are resistant to a range of solvents and acids. They feature a rugged PVC coating for good abrasion resistance over a cotton/jersey liner for enhanced comfort and flexibility. The rough grip, combined with a 14 gauntlet, provides excellent wet grip for more secure handling.

# Tychem® NT420

CAT III  
**CE**  
2777

EN ISO 374-1  
TYPE B  
  
JKOPT

EN ISO 374-5  
  
BACTERIA & FUNGI

\*  
Refer to tychemgloves.  
dupont.com for food contact  
certificates and restrictions

Chemical splash and oil protection. Designed for jobs requiring barrier protection, while keeping tactile discrimination.



- **Coating - Liner**  
100% nitrile - Unlined
- **Thickness**  
8 mil (0,2 mm)
- **Length**  
9.5 in (240 mm)
- **Grip**  
Smooth finish
- **Color**  
Blue
- **Cuff style - Shape**  
Rolled cuff - Ambidextrous
- **Size**  
From 6-7/S to 9-10/XL
- **Pairs/case**    **dispensers/case**    **pairs/dispenser**  
500                      20                      25

With a thickness of 8 mil (0,2 mm), Tychem® NT420 gloves offer a powder-free option that is suitable for jobs requiring the utmost in barrier protection while retaining tactile discrimination. Their “second-skin” feel and low-modulus formulation reduce hand fatigue.

\* Compliant with FDA food handling requirements  
21 CFR 177.2600

# Tychem® NT430

CAT III  
**CE**  
2777

EN ISO 374-1  
TYPE A  
  
JKLOPT

EN ISO 374-5  
  
BACTERIA & FUNGI

\*  
Refer to tychemgloves.  
dupont.com for food contact  
certificates and restrictions

Lightweight with “second-skin” feel. Resistant to oils, hydrocarbons and greases. Lint-free, dust-free cuff prevents dirt from entering the glove.



- **Coating - Liner**  
100% nitrile - Unlined
- **Thickness**  
9 mil (0,23 mm)
- **Length**  
12 in (305 mm)
- **Grip**  
Embossed pattern
- **Color**  
Blue
- **Cuff style - Shape**  
Rolled cuff - Anatomical shape
- **Size**  
From 6/XS to 11/XXL
- **Pairs/case**    **bags/case**    **pairs/bag**  
144                    12                    12

Blending a disposable and chemical resistant technology, Tychem® NT430 gloves are suitable for jobs requiring chemical performance plus optimum fit, feel and comfort. Lightweight with “second-skin” feel. The embossed pattern finish provides effective, long-lasting grip.

\* Compliant with FDA food handling requirements  
21 CFR 177.2600

# Tychem® NT450

CAT III  
CE  
2777

EN ISO 374-1  
TYPE A  
  
JKLOPT

EN ISO 374-5  
  
BACTERIA & FUNGI

EN 388  
  
4112X

\*  
Refer to tychemgloves.  
dupont.com for food contact  
certificates and restrictions

Flexible knit-lined dual nitrile glove. Protects against an array of solvents, oils and acids.



- **Coating - Liner**  
Double coated full nitrile - Cotton/polyester
- **Thickness**  
Thickness: 56 mil (1,42 mm)  
Nominal coating thickness: 13 mil (0,33 mm)
- **Length**  
14 in (356 mm)
- **Grip**  
Rough textured finish over hand surface
- **Color**  
Blue
- **Cuff style - Shape**  
Scalloped edge - Anatomical shape
- **Size**  
From 8/S to 11/XL
- **Pairs/case**    **bags/case**    **pairs/bag**  
72                    6                    12

With a double nitrile coating and a cotton/polyester liner, Tychem® NT450 is suitable for jobs requiring chemical performance and comfort. Featuring a cotton/polyester liner that absorbs perspiration for added comfort and a rough textured finish that ensures excellent grip.

# Tychem® NT470

CAT III  
**CE**  
2777

EN ISO 374-1  
TYPE A  
  
JKLOPT

EN ISO 374-5  
  
BACTERIA & FUNGI

EN 388  
  
2001X

\*  
Refer to tychemgloves.  
dupont.com for food contact  
certificates and restrictions

Resistant to a range of solvents, oils, hydrocarbons, animal fats, greases and other chemicals. Bisque finish allows secure handling in wet and dry conditions. Unlined, with an ergonomic design to maximize comfort.



- **Coating - Liner**  
100% nitrile - Unlined
- **Thickness**  
5 mil (0,38 mm)
- **Length**  
13 in (330 mm)
- **Grip**  
Bisque finish
- **Color**  
Green
- **Cuff style - Shape**  
Gauntlet - Anatomical shape
- **Size**  
From 6/XS to 11/XXL
- **Pairs/case**    **bags/case**    **pairs/bag**  
144                    12                    12

Tychem® NT470 is an unlined light nitrile glove which provides chemical resistance against a broad range of solvents, oils, animal fats and other chemicals. A 100% nitrile glove with good mechanical durability and bisque finish grip that makes work easier and safer in wet environments.

\* Compliant with FDA food handling requirements  
21 CFR 177.2600

# Tychem® NT480

CAT III  
CE  
2777

EN ISO 374-1  
TYPE A  
JKLOPT

EN ISO 374-5  
BACTERIA & FUNGI

EN 388  
2001X

\*  
Refer to tychemgloves.  
dupont.com for food contact  
certificates and restrictions

Bisque finish allows secure handling in wet and dry conditions.  
Resistant to a range of solvents, animal fats and other chemicals.  
Flock-lined with an ergonomic design for enhanced comfort.



- **Coating - Liner**  
100% nitrile - Cotton flock
- **Thickness**  
15 mil (0,38 mm)
- **Length**  
13 in (330 mm)
- **Grip**  
Bisque textured finish
- **Color**  
Green
- **Cuff style - Shape**  
Gauntlet - Anatomical shape
- **Size**  
From 6/XS to 11/XXL
- **Pairs/case**    **bags/case**    **pairs/bag**  
144                    12                    12

Tychem® NT480 is a flock-lined, 15 mil (0,38 mm) glove designed with the full scope of performance in mind. The bisque finish grip makes work easier and safer in wet environments.

# Tychem® NP530

CAT III  
CE  
2777

EN ISO 374-1  
TYPE A  
AKLMNT

EN ISO 374-5  
BACTERIA & FUNGI

EN 388  
2021X

\*  
Refer to tychemgloves.  
dupont.com for food contact  
certificates and restrictions

Double-dipped neoprene over natural rubber for dexterity.  
Resistant to a wide range of chemicals.



- **Coating-Liner**  
Neoprene over natural rubber - cotton flock
- **Thickness**  
26 mil (0,66 mm)
- **Length**  
12 in (305 mm)
- **Grip**  
Embossed pattern
- **Color**  
Black/blue
- **Cuff style - Shape**  
Gauntlet - Anatomical shape
- **Size**  
From 7/S to 10/XL
- **Pairs/case**    **bags/case**    **pairs/bag**  
144                    12                    12

Tychem® NP530 is a comfortable, flexible solution that does not impede the wearer's sense of touch. The embossed grip encourages fluids' run-off, while the 100% cotton flock lining enhances comfort. The outer neoprene coating offers protection against a wide range of chemicals, including caustics, solvents, greases and oils.

\* Compliant with FDA food handling requirements  
21 CFR 177.2600

Customer Service tel: +352 3666 5111 - mail: [mycustomerservice.emea@dupont.com](mailto:mycustomerservice.emea@dupont.com)

Viton™ name is a registered trademark of The Chemours Company. DuPont™, the DuPont Oval Logo, Tychem® and SafeSPEC™ are trademarks or registered trademarks of DuPont or its affiliates. ©2019. DuPont de Nemours Inc. L-6000-EN



# Tychem® NP560

CAT III  
CE  
277

EN ISO 374-1  
TYPE A  
AJKLMT

EN ISO 374-5  
BACTERIA & FUNGI

EN 388  
3031X

Resistant to a wide range of chemicals, including acids, caustics, solvents, greases and oils. Suitable for heavy duty work or applications involving exposure to the presence of solvents.



- **Coating-Liner**  
Fully coated flexible neoprene -  
15-gauge seamless, polyester knit liner
  - **Thickness**  
Thickness: 55 mil (1,39 mm)  
Nominal coating thickness: 30 mil (0,76 mm)
  - **Length**  
14 in (356 mm)
  - **Grip**  
Rough textured finish over hand surface
  - **Color**  
Black
  - **Cuff style - Shape**  
Gauntlet - Anatomical shape
  - **Size**  
From 8/S to 11/XL
- | • Pairs/case | bags/case | pairs/bag |
|--------------|-----------|-----------|
| 72           | 6         | 12        |

Featuring a 15-gauge seamless polyester knit liner and a tactile non-slip grip, Tychem® NP560 gloves offer excellent support, comfort and protection. The outer neoprene coating offers protection against a wide range of chemicals, including acids, caustics, solvents, greases and oils.

# Tychem® NP570 CT

CAT III  
CE  
2777

EN ISO 374-1  
TYPE A  
AJKLMT

EN ISO 374-5  
BACTERIA & FUNGI

ANSI CUT  
A5

EN 388  
3X43E

Protection where tasks present the dual risk of chemical exposure and cut. Provides ANSI level A5 and EN level 5 cut protection and defense against acids, caustics, solvents, greases and oils.



- **Coating - Liner**  
Neoprene -  
13-gauge engineered yarn
- **Thickness**  
Thickness: 68 mil (1,73 mm)  
Nominal coating thickness: 30 mil (0,76 mm)
- **Length**  
14 in (356 mm)
- **Grip**  
Rough textured finish over hand surface
- **Color**  
Black
- **Cuff style - Shape**  
Gauntlet - Anatomical shape
- **Size**  
From 8/S to 11/XL
- **Pairs/case**    **bags/case**    **pairs/bag**  
72                      6                      12

Combining an engineered yarn and a neoprene coating, Tychem® NP570 CT provides ANSI level A5 and EN level 5 cut protection, as well as defense against acids, caustics, solvents, greases and oils. The 13-gauge seamless and cut-resistant engineered knit liner together with the flexible coating offer the optimum in comfort and endurance.

# Tychem® BT730

CERTIFICATION PENDING

CAT III  
**CE**  
2777

EN ISO 374-1  
TYPE A  
  
ABCIKLMNPST

EN ISO 374-5  
  
BACTERIA & FUNGI

EN 388  
  
0110X

Protection against a wide array of chemicals. Provides resistance to many highly corrosive acids and is designed for handling ketones and alcohols.



- **Coating - Liner**  
Fully coated butyl - Unlined
- **Thickness**  
14 mil (0,36 mm)
- **Length**  
14 in (356 mm)
- **Grip**  
Rough finish over hand surface
- **Color**  
Black
- **Cuff style - Shape**  
Rolled - Anatomical shape
- **Size**  
From 7/S to 11/XXL
- **Pairs/case**    **bags/case**    **pairs/bag**  
12                    12                    1

Tychem® BT730 gloves are designed to provide a combination of protection and dexterity when handling ketones and esters. These 14 mil gloves feature a rough grip and provide resistance to many highly corrosive acids. Their light and thin coating offers a “second-skin” feel with a rough grip, which is ideal for working in greasy and damp environments.

# Tychem® BT770

CERTIFICATION PENDING

CAT III  
CE  
2777

EN ISO 374-1  
TYPE A  
ABCIKLMNPST

EN ISO 374-5  
BACTERIA & FUNGI

EN 388  
2110X

Provides protection against a variety of highly corrosive chemicals, alcohols, ketones and esters.



- **Coating - Liner**  
Fully coated butyl - Unlined
- **Thickness**  
25 mil (0,64 mm)
- **Length**  
14 in (356 mm)
- **Grip**  
Rough finish over hand surface
- **Color**  
Black
- **Cuff style - Shape**  
Rolled - Anatomical shape
- **Size**  
From 7/S to 11/XXL
- **Pairs/case**    **bags/case**    **pairs/bag**  
12                    12                    1

Tychem® BT770 gloves are designed to provide both protection and dexterity during exposure to ketones and alcohols. With a rough grip and 25 mil (0,64 mm) thickness, they are engineered to provide ease of movement and safe handling during continuous wear.

# Tychem® VB830

CERTIFICATION PENDING

CAT III  
CE  
2777

EN ISO 374-1  
TYPE A  
  
ABCDFJLMNPST

EN ISO 374-5  
  
BACTERIA & FUNGI

EN 388  
  
1110X

Provides protection from a variety of chlorinated solvents and aliphatic or aromatic hydrocarbons, such as benzene, toluene and xylene.



- **Coating - Liner**  
Fully coated Viton™ over butyl - Unlined
- **Thickness**  
12 mil (0,30 mm)
- **Length**  
12 in (305 mm)
- **Grip**  
Smooth finish
- **Color**  
Black
- **Cuff style - Shape**  
Rolled - Anatomical shape
- **Size**  
From 7/S to 11/XXL

• Pairs/case	bags/case	pairs/bag
12	12	1

Tychem® VB830 unlined gloves feature a Viton™ coating over Butyl that provides resistance to many highly corrosive acids. They are specifically designed for handling aliphatic and aromatic hydrocarbons, such as benzene, toluene, and xylene, over limited periods. At a slim 12 mil (0,30 mm) thickness, their smooth finish offers a “second-skin” feel.

# Tychem® VB870

CERTIFICATION PENDING

CAT III



2777

EN ISO 374-1  
TYPE A



ABCDFJLMNPST

EN ISO 374-5



BACTERIA & FUNGI

EN 388



2121X

Provides protection from a variety of chlorinated solvents and aliphatic or aromatic hydrocarbons, such as benzene, toluene and xylene. Suitable for military applications.



- **Coating - Liner**  
Fully coated Viton™ over butyl - Unlined
- **Thickness**  
28 mil (0,71 mm)
- **Length**  
14 in (356 mm)
- **Grip**  
Smooth finish
- **Color**  
Black
- **Cuff style - Shape**  
Rolled - Anatomical shape
- **Size**  
From 9/L to 11/XXL
- **Pairs/case**    **bags/case**    **pairs/bag**  
12                    12                    1

Tychem® VB870 unlined gloves feature a Viton™ coating over Butyl that provides resistance to many highly corrosive acids. They are specifically designed for handling aliphatic and aromatic hydrocarbons - such as benzene, toluene, and xylene - over prolonged periods. With a 28 mil (0,71 mm) thickness, they offer suitable protection for many industrial and military applications.